


Cast Iron Steam Valves

DESCRIPTION	MATERIAL
BODY	CI IS 210 FG 150
BONNET	CI IS 210 FG 150
SPINDLE	S.S. 410
GLAND	CI IS 210 FG 150
BUSH	G.M. IS 318 Gr.2
SEAT	S.S.304
DIAPHRAGM	S.S.304
DIAPHRAGM NUT	BRASS IS 319
HAND WHELL	CAST IRON

SPECIFICATIONS	
CAST IRON STEAM VALVES	STOP VALVE, CHECK VALVE
MATERIAL	CAST IRON
END CONNECTIONS	FLANGED
END FLANGES	BS 10 TABLE-H
WORKING PRESSURE	13 Kg/sq.cm. & TEMP UP TO 220°C
TESTING PRESSURE	26 kg/sq.cm. HYDRAULIC
MANUFACTURING STANDARDS	AS PER BS 1873
TESTING STANDARDS	BS 6755 PART - I
SIZE RANGE	15 - 150 mm

CAST IRON STEAM STOP VALVE

SIZE	DIMENSION				
	A	ØB	T	D	PCD
mm	mm	mm	mm	mm	mm
15	130	114.3	12.7	185	82.5
20	140	114.3	12.7	205	82.5
25	152	120.7	14.3	218	87.3
40	203	139.7	17.5	258.3	104.7
50	254	165.1	19.05	278	127
80	310	203.2	22.2	344.5	165.1
100	360	228.6	25.4	436	190.5
150	480	305	25.4	511	260.3

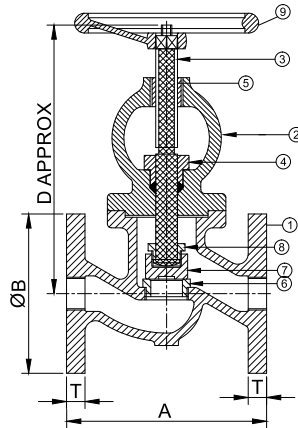

DESCRIPTION MATERIAL

BODY	CI IS 210 FG 150
COVER	CI IS 210 FG 150
DIAPHRAGM	S.S.304
SEAT	S.S.304

CAST IRON STEAM CHECK VALVE (NRV)

SIZE	DIMENSION				
	A	ØB	T	D	PCD
mm	mm	mm	mm	mm	mm
15	130	114.3	12.7	63	82.5
20	140	114.3	12.7	73	82.5
25	152	120.7	14.3	75	87.3
40	203	139.7	17.5	91	104.7
50	254	165.1	19.05	119	127
80	310	203.2	22.2	152	165.1
100	360	228.6	25.4	176.5	190.5
150	480	305	25.4	195.8	260.3

